

Proximity

Super-link Proximity
Control system

HA3060



HA3060

The HA3060 is specifically designed as a high memory capacity and multiple connected access control system. Local loop of 1024 readers, 15,000 users and 15,000 transactions storage capacity, ideal for high traffic indoor and outdoor use.



HEART

CEFC

ISO 9001 Certified




Smart Proximity

Super-link Proximity Control system

Characteristics


- Proximity type reader , read range upto 10cm
- Network configuration , upto 1024 devices
- Electric lock temporary suspend function
- Force entry alarm
- Password time zone restraint
- Holiday access restraint
- Module design,reader separated from controller,higher safety index
- 32 sets time zone provided
- 8 sets twelve months holiday schedule
- Memory store upto 15000 card holder , and 15,000 transaction records in off line position
- 32 sets time zone provided , including 20 access time zone , 8 password time zone , 1 exit button , 1 holiday , 1 temporary suspend and 1 door left open not alarm time zone
- Access mode selectable
 - 1.reading proximity card
 - 2.card data + personal password
 - 3.keyin card data
- Anti-duress function available
- Anti-passback function
- Arm or disarm connected security system
- Patrol function available
- Relay and sensor for access control capability
- Personal password function
- User card can be registered /deleted in batch mode
- Alarm to be activated once incorrect password key-in five times within four minutes.
- Activate alarm status either by force entry , tamper switch, anti-duress , security function or door opened off limit
- Audible key tone for easy operate
- Strike , alarm and duress relay drive time selectable (1-255 seconds)
- Door left open time selectable (1-255 seconds)
- A separate relay module design , high security provided
- With power saver function , the back light of LCD turn of f once three minutes
- A warning message shown when more then 90% memory to be used

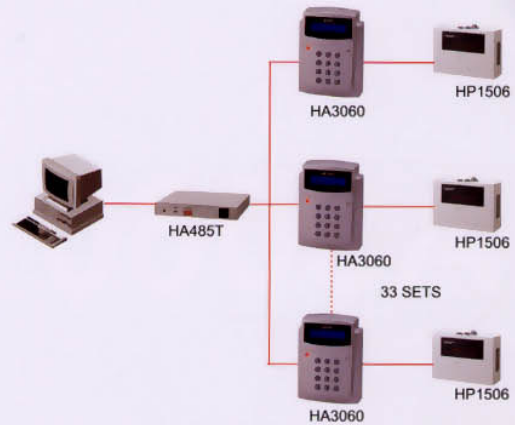

Network configuration upto 32 sets with HA485 connected

The specification of HA3060 proximity access control

Model	HA3060
Reader Type	Proximity
Reader Range	Up to 10cm with EM compatible card 125 KHZ
Communication interface	2-wire RS485
Communication baud rate	9600、19200BPS
Communication format	N81
Battery capacity	Timer IC and data maintained upto two months after failure
Display	16 characters ×2 lines LCD with backlight
Keypad	12 key (0-9 , × , #)
Indicator	Bi-color LED (Green / Red)
Memory Buffer	15,000 cardholders /15,000 transactions
Case Material	ABS (UL 94V-0)
Dimension	150 (H) ×110 (W) ×45 (D) mm
Weight	380 g
Working Voltage	DC 10 - 15 volts
Power Consumption	300mA Max.@12VDC
Operating Temperature	0°C~50°C
Humidity	5%~95%(No condensation)
Approved	IP 34 CE

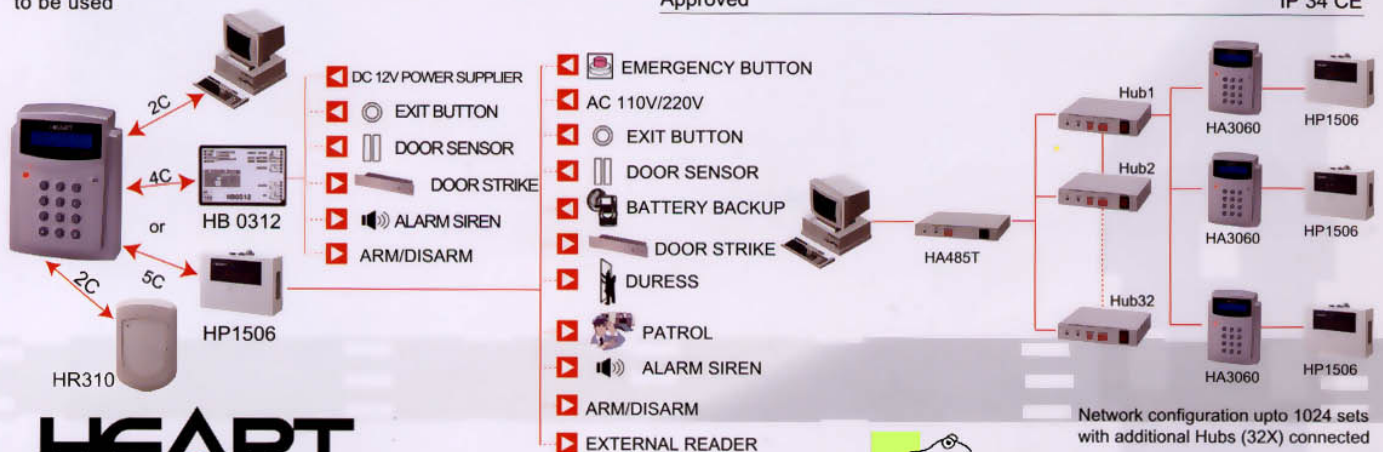

Network configuration upto 1024 sets with additional Hubs (32X) connected

HEART

HEART ENTERPRISE CO., LTD.



大青蛙網絡有限公司
GrandFrog Networks Co., Ltd.